

Pompe Tifone Flangiate



T-25

T-40

T-70

T-110

T-180

MOD.	R.P.M.	Q (HL/h)	A x B x H	KG	Bar	CONNECTORS	MOTORE
T-25/FL	900	25 HL/h	325x210x300	14,8	4	Ø25	1-Phase 0,5 HP 3-phase 0,6 HP
T-40/FL	900	40 HL/h	355x550x600	29	3	Ø40	1-Phase 0,8 HP 3-phase 1,0 HP
T-70/FL	900	70 HL/h	370x660x620	20	3	Ø40	1-Phase 1,10 HP 3-phase 1,10 HP
T-110/FL	900	110 HL/h	330x700x680	37	3	Ø50	1-Phase 2,1HP 3-phase 1,5 HP
T-180/FL	900	180 HL/h	820x420x780	50	3	Ø60	3-phase 2,1 HP

Pompe Tifone a 2 velocità assiale

MOD.	R.P.M.	Q (HL/h)	A x B x H	KG	Bar	CONNECTORS	MOTORE
T-70/A2V	1° 380 2° 760	1° 35 HL/h 2° 70 HL/h	400x880x740	37	3	Ø40	3-phase 1,1 HP
T-110/A2V	1° 380 2° 760	1° 45 HL/h 2° 90 HL/h	420x800x800	40	3	Ø50	3-phase 1,1 HP
T-180/A2V	1° 380 2° 760	1° 85 HL/h 2° 170 HL/h	820x420x780	48	3	Ø60	3-phase 1,8 HP
T-250/A2V	1° 380 2° 760	1° 120 HL/h 2° 250 HL/h	960x420x780	65	3	Ø80	3-phase 3,5 HP
T-500/A2V	1° 380 2° 760	1° 250 HL/h 2° 500 HL/h	420x800x800	40	3	Ø80	3-phase 4,5 HP



A2V

Pompe Tifone VM155 - VM0 variatore meccanico

MOD.	R.P.M.	Q (HL/h)	A x B x H	KG	Bar	CONNECTORS	MOTORE
T-70/VM155	155÷1000	12÷85 HL/h	400x880x740	45	3	Ø40	1-Phase 2,10 HP 3-phase 1,10 HP
T-110/VM155	155÷1000	18÷120 HL/h	420x800x800	53	3	Ø50	1-Phase 2,10 HP 3-phase 1,10 HP
T-180/VM155	155÷750	32÷170 HL/h	880x420x780	74	3	Ø60	3-phase 2 HP
T-250/VM155	155÷750	45÷250 HL/h	830x420x780	75	3	Ø80	3-phase 2,5 HP
T-500/VM155	155÷750	110÷500 HL/h	420x800x800	53	3	Ø80	3-phase 5 HP
T-70/VM0	0÷900	0÷80 HL/h	400x880x740	53	3	Ø40	1-Phase 2,10 HP 3-phase 1,10 HP
T-110/VM0	0÷900	0÷110 HL/h	420x800x800	60	3	Ø50	1-Phase 2,10 HP 3-phase 1,10 HP
T-180/VM0	0÷750	0÷170 HL/h	880x420x780	80	3	Ø60	3-phase 2 HP
T-250/VM0	0÷750	0÷250 HL/h	830x420x780	75	3	Ø80	3-phase 2,5 HP
T-500/VM0	0÷750	0÷500 HL/h	420x800x800	60	3	Ø80	3-phase 5 HP



VM155



VM0

Pompe Tifone T-180 TC2V e TC4V

Pompa Tifone T-180/QR per rimontaggi



T-180 TC

MOD.	R.P.M.	Q (HL/h)	A x B x H	KG	MOTORE
T-180/QR	900	200 HL/h	820x420x780	50	3-phase 2,1 HP
T-180/TC2V	1° 350	1° 80 HL/h	650x420x820	45	1-Phase 2 HP
	2° 550	2° 120 HL/h			3-phase 1,5 P
T-180/TC4V	1° 350	1° 80 HL/h	650x420x820	45	3-phase 1,8 HP
	2° 550	2° 120 HL/h			
	3° 700	3° 160 HL/h			
	4° 1100	4° 210 HL/h			




T-180 QR

Pompe Tifone con INVERTER



MOD.	R.P.M.	Q (HL/h)	A x B x H	KG	Bar	CONNECTORS	MOTORE
T-70/CCD	32÷750	3,5÷60 HL/h	400x880x800	50	3	Ø40	3-phase
T-110/CCD	32÷750	3,5÷90 HL/h	420x800x800	55	3	Ø50	3-phase
T-180/CCD	32÷750	7÷170 HL/h	420x900x800	80	3	Ø60	3-phase
T-250/CCD	32÷750	12÷250 HL/h	420x960x800	80	3	Ø80	3-phase
T-500/CCD	20÷750	20÷500 HL/h	500x1200x900	120	3	Ø80	3-phase

Pompe Tifone "SF" MONOVITE con INVERTER- STATORE FLOTTANTE

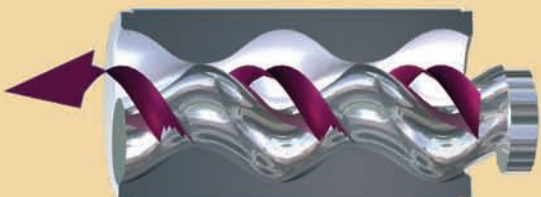

SF 25



SF 40